

FEEDBACK DATA LOGGER STARTER KIT

TEMPERATURE AND RELATIVE HUMIDITY
FBSK5.1



KIT CONTENTS:

- 1 x DL-RHTX Data Logger
- 1 x Hygro-i2 probe
- 1 x Wall mounting
- 1 x Tripod Stand



Tramex Feedback
DataLogger App
For use with Tramex
DL-RHTA and DL-RHTX
Dataloggers.

Available on:



The Tramex Feedback DataLogger and App have been designed and developed by Tramex for professionals who depend on accurate, reliable readings using the very best, state of the art technology and performing BS 8201, 8203, 5325 and ASTM F2170. The Feedback DataLogger and App log up to 100,000 data point entries for relative humidity, temperature, dew point and grains per pound, transmitted wirelessly via Bluetooth BLE technology to your mobile device. On the App you can visualise Live Readings, Thermal Conditions and Psychrometric Charts, as well as creating and exporting spreadsheets, charts and reports. The Tramex Feedback DataLogger requires the Tramex Feedback Data Logger App and a compatible iOS or Android mobile device.

FEATURES

- Bluetooth BLE enabled for use with mobile devices.
- Up to 100,000 data point entries possible.
- Instant set up and start modes.
- Used to perform BS 8201, 8203, 5325 and ASTM F2170.
- Ambient and In-situ RH and temperature logging
- Intuitive and instructive APP interface.
- Adjustable interactive chart, spreadsheet, report and easy-export functions.
- Connectivity up to 50 meters (165ft) for highly accessible data downloads.



Product order code: FBSK5.1

BS 8201, 8203, 5325 and ASTM F2170 COMPLIANT



SUPPORTED MEASUREMENTS

- Ambient Relative Humidity, Temperature, Dew point, Grains per pound.
- In Situ Relative Humidity, Temperature, Dew point, Grains per pound (with optional plug-in RH Probe)
- Contact Temperature, Estimated contact RH, Ambient Dew Point, Contact Delta Temperature (with optional contact Temperature Probe)
- Psychrometric chart showing Relative Humidity, Specific Volume, Wet Bulb Temperature, Dry Bulb Temperature, Enthalpy, Humidity Ratio, Dew Point.

DATALOGGER SPECIFICATIONS

With built-in Ambient RH + Temperature sensor; Plug-in RH + Temperature Sensor (optional); Contact Temperature Probe (optional) providing the best available accuracy tolerances of 1.5%RH & 0.1°C.

Size:	100mm x 90mm x 35mm (3.94" x 3.54" x 1.38")
Weight:	100g (3.53oz)
Construction:	ABS enclosure
Power:	1 x AA type battery 1.5 Volt
Memory:	100,000 data point entries (samples of Ambient RH and temperature; Surface Temperature)
Logging Rate:	Logger interval adjustable between 5 minutes and 1 hour
Transmission Range:	Up to 50m (165ft) line-of-sight
Bluetooth:	BLE Bluetooth Low Energy 4.2 compliant, Bluetooth 5 advertising
Included:	Wall Mounting and Tripod Stand

HUMIDITY AND TEMPERATURE SPECIFICATIONS

RELATIVE HUMIDITY SENSOR SPECIFICATIONS:

Range:	0 to 100%RH
Accuracy:	±1.5%RH Range 0% to 80%RH ±2.0%RH Range 80% to 99%RH (@25°C (77°F))
Resolution:	0.1% over the complete range
Drift:	<0.25%RH per year


TEMPERATURE SENSOR SPECIFICATIONS:

Range:	-40°C to 125°C (-40°F to 257°F)
Accuracy:	±0.1 °C Range 20°C to 60°C (±0.1°F Range 68°F to 140°F)
Sensor Protection:	PTFE Film protects sensor opening from water & dust
Drift:	<0.03°C (0.04°F) per year


CONTACT TEMPERATURE PROBE (OPTIONAL)

Units:	°C (°F)
Temperature Range:	-30°C to +80°C (-20°F to +175°F)
Accuracy:	±0.5°C from -10°C to +85°C (±0.9°F from 14°F to 185°F)
Resolution:	0.1% over the complete range


Live Readings

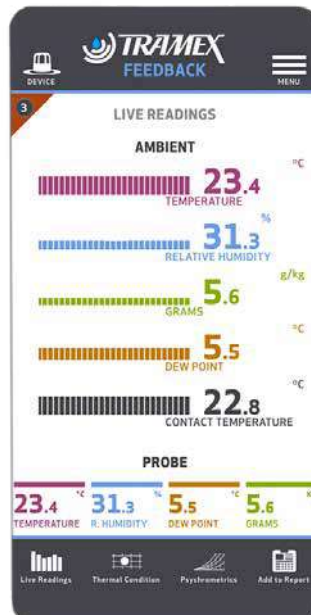


Thermal Condition

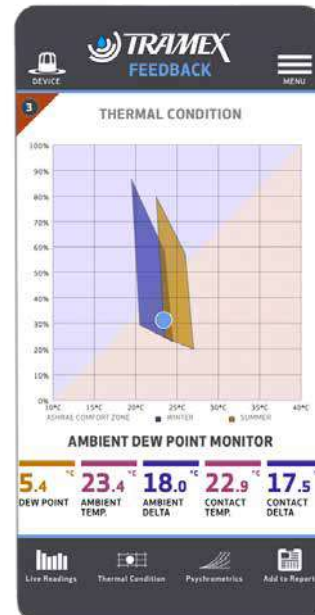

Psychrometric Chart

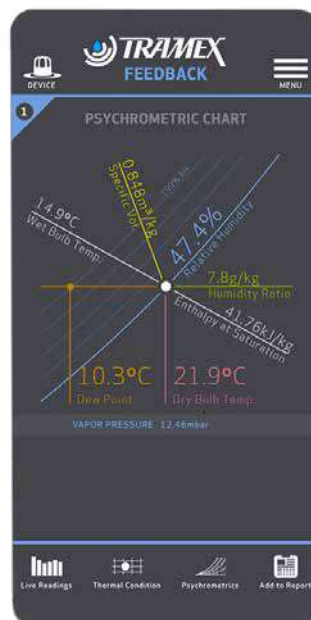

Available Devices

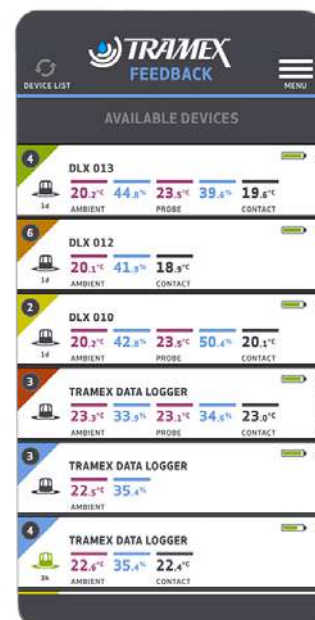

BATTERY

Power supply: 1 x AA type battery 1.5 Volt
Battery life: Over 1 year based on logging intervals of 5mins, using an alkaline battery with a nominal voltage of 1.5V as supplied.

Importør:

Impex Produkter AS
Gamle Drammensvei 107
1363 Høvik
www.impex.no
info@impex.no
Tel.: 22 32 77 20

